

BVO204F-X

700TVL 3-Axis Mini Dome Camera

Product Overview

Bavono BVO204F-X High Resolution Day/Night Mini Dome Camera utilizes 1/3" Sony Super HAD II CCD image sensor and the latest Digital Signal Processing (DSP) technology to deliver a high resolution of 700TVL. It is a compact and lightweight camera featuring built-in OSD and UTC (up-the-coax) control, a miniature exterior, easy installation, and a high price-performance ratio. UTC control technology enables control of the OSD menu via a coaxial cable with the use of a remote controller, which makes it easier and more convenient to set a camera after installation. Suitable applications include offices, factories, warehouses, restaurants, shopping malls, hotels, and retail stores.

Automatic White Balance

Colors are affected by different lighting sources and appear differently under sunlight due to the change in color temperature. Human eyes have the ability of adapting to the change in color temperature, but cameras often have difficulty adjusting so that what appears white to humans may not be rendered correctly in an image resulting in color deviation. Bavono cameras feature an automatic white balance function with a manual option which enables colors to be rendered correctly regardless of lighting source to eliminate the need to reset colors subsequently.

Digital Noise Reduction

1/3" SONY

Super HAD

CCD II Image Sense

DSP (Digital Signal Processing) cameras utilize special digital noise reduction algorithms to significantly eliminate signal disturbances and color noise. As a result, motion trails are minimized to deliver high quality images.

Absolute Color Accuracy

Bavono cameras utilize High Resolution Imaging to deliver more realistic colors and contrast enhancement.

Electronic Shutter

Electronic Shutter ensures clarity of objects in high speed motion. Shutter speed is directly proportional to image quality.

Features

- > 1/3" Sony Super HAD CCD II
- More than 700TVL(Color)/800 TVL(B/W) of Horizontal Resolution
- Minimum Illumination of 0.05 Lux at F1.2, 0 Lux (IR On)
- UTC (up-the-coax) technology for remote OSD configuration (compatible UTC controller is required)
- The defog function enhances picture clarity during conditions such as rain, fog, and haze
- ▶ 3-axis rotation mechanism
- Digital Wide Dynamic Range
- 8 zones privacy masking
- Digital Noise Reduction for Reducing HDD Capacity
- Power Supply: DC 12V

 700 TVL (Color) 80 TVL (BW)


 700 TVL (Color) 80 TVL (BW)

 700 TVL (Color) 80 TVL (BW)

 Rosolution

 Rosolution

Dimensions

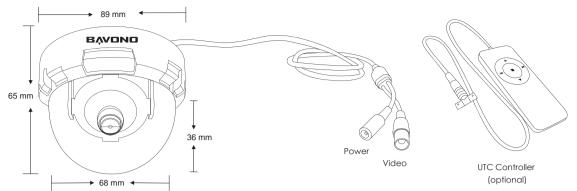

Specifications

Model	BVO204F-X
Video Standard	NTSC / PAL
Image Sensor	1/3" Sony Super-HAD II CCD
Total Picture Elements	1020(H) X 508(V) / 1020(H) X 596(V)
Effective Picture Elements	976(H) X 494(V) / 976(H) X 582(V)
Synchronizing System	Internal, AC Line Lock
Horizontal Resolution	Color: More than 700 TVL B/W: More than 800 TVL
Minimum Illumination	Color: 0.05 Lux@F1.2(50IRE) / 0.06 Lux(15IRE) B/W: 0.01Lux@F1.2(50IRE) / 0.006 Lux(15IRE)
Video S/N Ratio	52dB
OSD Language	English / Simplied Chinese / Traditional Chinese
Day / Night Mode	Auto / Day / Night / Ext / CDS
Highlight Compensation (HLC)	Low / Middle / High
High Speed Shutter	Indoor Outdoor (1/60(1/50) ~ 1/120Ksec)
Flickerless Mode	OFF / ON
WDR	AUTO / MANUAL (Low / Middle / High)
Auto Gain Control (AGC)	Level Setting
ALC (Auto Level Control)	AI Lens (DC)
Defog	AUTO / MANUAL (Low / Middle / High)
Digital Noise Reduction (DNR)	Off / Low / Middle / High (Adaptive 2D)
Gamma	0.35 ~ 0.70
White Balance	ATW / AWC / Manual
Camera No. / ID	Off/On (Max. 255 NO, 8ea ID/1Line)
Motion Detection	4 zones (On/Off, Position, Sensitivity)
Privacy Masking	8 zones (On/Off, Color, Position)
Lens	F3.6mm(Standard)
Video Output	VBS 1.0V p-p (75ohm Terminated)
Power Input	DC12V ± 10%
Power Consumption	Less than 1.2W
Operating Temperature	-10°C ~ +50°C
Operating Humidity	Less than 90%
Shell Material	Plastic
Shell Color	White

Applications











Hotels



Offices

Restaurant Chains

Shopping Malls

Warehouses

ouses

CE

Retail Stores



