

BVO228W

700TVL Ultra Wide Dynamic Range Dome Camera

Product Overview

Bavono BVO228W Ultra Wide Dynamic Range Dome Camera utilizes 1/3" Sony Super HAD CCD II Image Sensor with a high horizontal resolution of up to 700 TV Lines. This state-of-the-art camera features Ultra Wide Dynamic Range to deliver a true-color and well exposed picture even under the most extreme lighting conditions.

Wide Dynamic Range

In high contrast situations, when the field of view contains a wide range of lighting conditions such as backlight circumstances, overexposure of bright areas and underexposure of dark areas would have substantial adverse effects on the picture quality. Wide Dynamic Range cameras could overcome this problem by capturing both dark and light areas of an image and displaying the details of all areas in true-color including the darkest and the lightest areas.

Horizontal Resolution

Horizontal Resolution is one of the key factors in assessing the quality of cameras expressed in Television Lines (TVL). Optical low-pass filters are used in Bavono cameras to eliminate color aliasing. Serial Signal Processing and image enhancement technology delivers a high resolution of 700 TVL. The image quality is further enhanced via advanced image processing techniques and special algorithms.

Digital Noise Reduction

DSP (Digital Signal Processing) cameras utilize special digital noise reduction algorithms to significantly eliminate signal disturbances and color noise. As a result, motion blur is minimized to deliver high quality images.

Sens-up

Sens-up is an image processing technology that allows extra light to enter the camera in low light conditions, in order to deliver a clear image. This is achieved by adjusting the slow shutter speed to vary the amount of light received by the image sensor. A low-lux CCD camera with Sens-up technology is also known as a starlight camera.

Privacy Masking

The Privacy Masking function allows users to block out designated areas of a scene where video surveillance is not desirable.

Key Features

- ▶ 1/3" Sony Super HAD CCD II Image Sensor
- ▶ Ultra Wide Dynamic Range
- ▶ Horizontal resolution of up to 700 TVL
- ▶ Minimum illumination of 0.1 Lux at F1.2 and 0.02 Lux at F1.2 with sens-up on
- ▶ Built-in IR-cut filter
- ▶ Day/night mode to enable continuous 24 hour surveillance
- ▶ 4 zones motion detection
- ▶ 15 zones privacy masking
- ▶ Intelligent 3D DNR for reducing HDD capacity
- ▶ Built-in OSD (on screen display)
- ▶ Built-in balun
- ▶ Supports dual power supply: DC 10V - 40V / AC 7V - 40V




1/3" Sony Super HAD CCD II	700 TVL	0.02 Lux (Sens-up On)	IR-Cut	Day / Night	3D	15 Zones	OSD
Image Sensor	Resolution	Min. illumination	Filter	Sensor Mode	DNR	Privacy Masking	Menu

Specifications

Model	BVO228W	
Video Standard	NTSC	PAL
Image Sensor	1/3" SONY Super HAD CCD II	
Total Picture Elements	1028(H) X 508(V)	1028(H) X 596(V)
Effective Picture Elements	976(H) X 494(V)	976(H) X 582(V)
Synchronizing System	Internal, AC Line Lock	
Horizontal Resolution	700 TVL	
Minimum Illumination	Color: 0.1 Lux@F1.2(50IRE) / 0.02 Lux@F1.2(15IRE) B/W: 0.08Lux@F1.2(50IRE) / 0.002Lux@F1.2(15IRE)	
Video S / N Ratio	52dB	
OSD Languages	Multi-language	
Day / Night Mode	Auto (INT or EXT) / Color / BW	
ATW	1,800 ~ 10,500K	
High Speed Shutter	1/60(1/50) ~ 1/10K /sec	
Wide Dynamic Range	OFF / LOW / MIDDLE / HIGH	
AGC	Level Setting	
IR-Cut Filter	Built-in	
Iris	DC Auto Iris / Manual Iris	
DNR	3D (level setting)	
Sens-up	OFF / AUTO	
Smart IR	ON / OFF	
White Balance	ATW / PUSH / USER1 / USER2 / ANTI CR / MANUAL / PUSH LOCK	
Camera ID	ON / OFF (Letter A to Z, Numerals 0 to 9, Symbols)	
Motion Detection	4 Zones	
Privacy Masking	15 Zones	
Miscellaneous Functions	BLC, HLC, DIS, E-zoom, Sharpness, Flip	
Video Output	VBS 1.0V p-p (75ohm Terminated)	
Fast Connection	Built-in balun	
Lens	Auto iris lens (2.8 - 12mm)	
Power Input	DC 10V - 40V / AC 7V - 40V	
Power Consumption	Less than 1.5W	
Operating Temperature	- 10° C ~ +50° C	
Operating Humidity	Less than 90%	
Shell Material	Premium Plastic	
Dimensions (mm)	139(Ø) X 108(H)	
Gross Weight (g)	470	

Dimensions

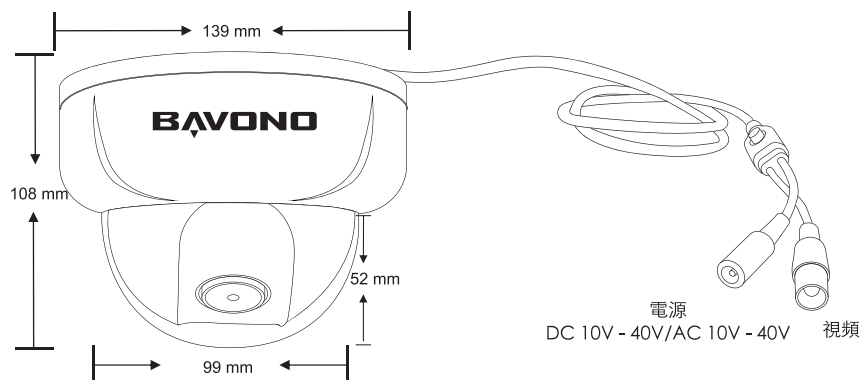

BAVONO

<http://www.bavono.com>

© 2015 Bavono Security Group. All rights reserved.

DM#. G2302